



Reduced transport height:

Tonutti's arm folding design keeps transport height to a minimum.

Transport stability:

the larger tread width and the balanced overall design ensure maximum stability during transport.



High bore welded cylinders:

ensures that the open/close cylinders work, even on older tractors with low hydraulic pressure.

Locking system for safe road transport:

simple and easy to set.



Rake with one side!

By simply using the locking system and the double actuated cylinders, the operator can either rake with the right or left side in smaller or odd shaped fields.

TECHNICAL CHARACTERISTICS

	TCR 8 PRO	TCR 10 PRO	TCR 12 PRO
Number of finger wheels	8	10	12
Finger wheel diameter - feet (mm)	4' 7" (1400)	4' 7" (1400)	4' 7" (1400)
Tine diameter - feet (mm)	9/32" (7)	9/32" (7)	9/32" (7)
* Minimum working width - feet (mm)	15' 8" (4800)	16' 9" (5100)	18' 8" (5700)
* Maximum working width - feet (mm)	18' 8" (5700)	21' 4" (6500)	23' 4" (7100)
* Minimum windrow width - feet (mm)	2' 11" (900)	2' 11" (900)	2' 11" (900)
* Maximum windrow width - feet (mm)	6' 11" (2100)	6' 11" (2100)	6' 11" (2100)
Overall length - feet (mm)	18' 11" (5500)	20' 4" (6200)	23' 7" (7200)
Minimum transport height - feet (mm)	8' 5" (2570)	8' 5" (2570)	8' 5" (2570)
Maximum transport height - feet (mm)	9' 5" (2860)	9' 5" (2860)	9' 5" (2860)
Minimum overall transport width - feet (mm)	9' 2" (2800)	9' 2" (2800)	9' 6" (2900)
Tread width - feet (mm)	6' 8" (2030)	6' 8" (2030)	7' 4" (2230)
Tire size	205/65 - 15"	205/65 - 15"	205/65 - 15"
Tractor requirements HP (kW)	30 (22,4)	30 (22,4)	50 (37,3)
Gross - lbs (kg)	1350 (610)	1523 (690)	1752 (795)
Tongue load - lbs (kg)	158 (72)	191 (87)	213 (97)

* Variable according to crop conditions

OPTIONAL

Spare transport wheel (Rim+Tire)	✓	✓	✓
Fenders	✓	✓	✓
Hydr. center kicker rake wheel (Ø 4' 7")	✓	✓	✓
Electr./Hydr. windrow adjustment kit	✓	✓	✓

ADDITIONAL PRODUCT OFFERINGS



TONUTTI reserves the right to make changes or add improvements at any time without notice. The information contained here in is general in nature and is not intended for specific application purposes.



Tonutti Italy
Via Gino Tonutti 3 - 33047
Remanzacco (UD) Italy
Tel. + 39 0432 667015
Fax + 39 0432 668282
info@tonuttigroup.com
www.tonuttigroup.com

Tonutti U.S.A.
1909 Thomas Road
Memphis, TN 38134
Phone (901) 385 8841
Fax (901) 385 8288
info@tonuttiusa.com
www.tonuttigroup.com

Tonutti Russia
T. W. Limited
3 Tekhnicheskaya Street
Perm, 614070 Russia
Phone 007 (3422) 909096
Fax 007 (3422) 909096
twltd@perm.ru
www.tonuttigroup.com



ASSEMBLED in U.S.A.

8831U001


Since 1864, we have put our customers and their needs at the heart of our business, always ready to listen and better understand their requests.

Thanks to the satisfaction and loyalty of our customers, the dedication and expertise of our employees, and our commitment to innovation, we continue to be a market leader by bringing the lessons we learn throughout the world to our customers in the form of improved products and farming concepts.

- We are committed to:
- our customers
 - continued growth
 - worldwide leadership through the development of superior products
 - the environment through the design and manufacture of eco-friendly products with reduced fuel consumption requirements

Today, the Tonutti Group employs more than 500 people across three continents with sales and manufacturing facilities in the United States, Italy, France, Russia, and China providing us global coverage with local knowledge.

At Tonutti Group, we have been providing farmers with innovative solutions for over 145 years. Our commitment to innovation and growth ensures that we will continue to be a leader for generations to come.

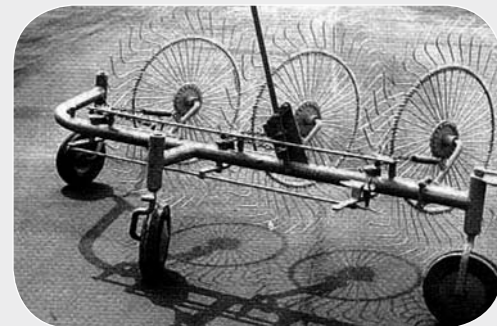

Model **T3** pull rake - 1955



1 Adjustable hitch: allows the operator to adjust the tongue height to match the tractor hitch, allowing the rake to work more efficiently.



2 Jack stand: the transport location on top of the tongue puts the jack out of harms way.



3 Fenders (optional): allow the rake to stay clean in muddy conditions.



4 Spare tire + jack stand support (optional): allow you to change a flat in a matter of minutes, reducing down-time





10 Efficient spring suspension: adjustable spring suspension system allows the rake wheels to follow the contour of the ground, ensuring raking quality and crop care.



9 Easy windrow adjustment: windrow width can be adjusted quickly without the need for special tools. You can also order an optional **heavy duty electric actuator kit** that would allow you to adjust the windrow width from your tractor cab.



8 Rake wheel ground pressure adjustment: rake wheel ground pressure can be fine-tuned to ensure better raking efficiency in uneven terrain.

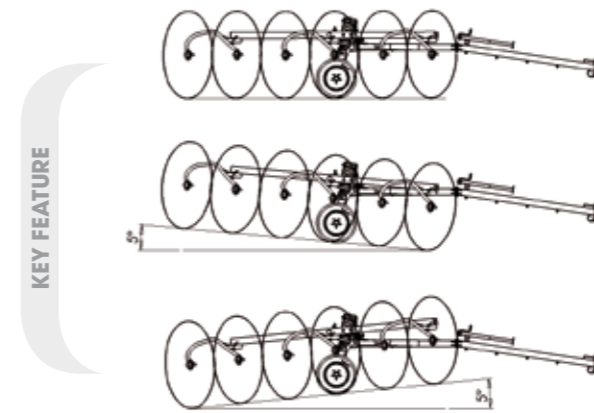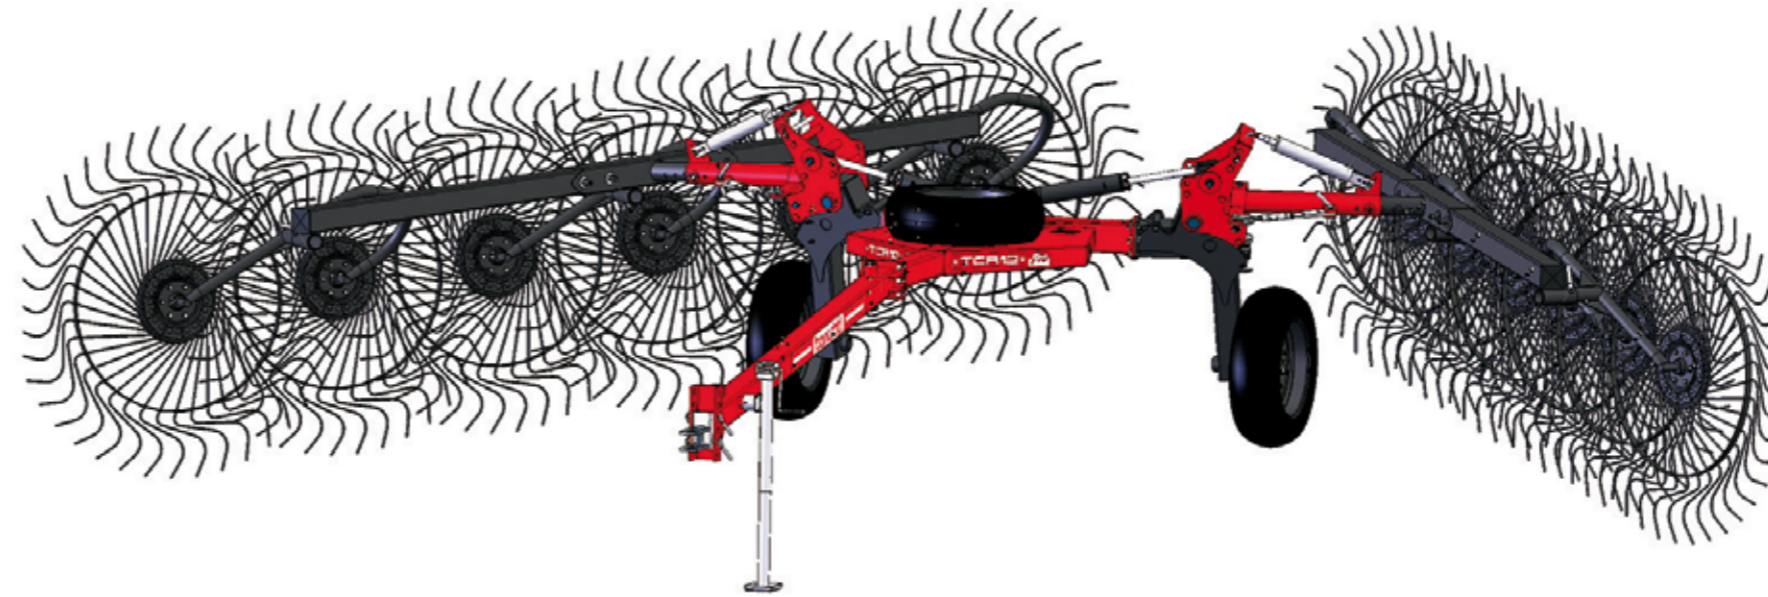

7 Rake wheel arms & frames are centrally hinged: Tonutti's patented design ensures good raking quality in uneven terrain and better efficiency at higher working speeds.



6 Larger center kicker wheel (optional): the 47" diameter center wheel allows you to turn the hay laying in the "dead zone" between the two wheel frames ensuring that all of the crop across the entire working width is moved.



5 Superior ground clearance: maximizes raking capacity. Both the mainframe and the rake wheel frames have been designed to optimize crop flow and windrow uniformity.

Pro LINE

**SIMPLE.
EFFICIENT.
RUGGED.**