



88581000

TECHNICAL SPECIFICATIONS	RM 4	RM 5	RM 6	RM 7	RMC 5	RMC 6	RMC 7
Fixed frame with tractor linkage categories 1 and 2	✓	✓	✓	-	-	-	-
Laterally adjustable frame with tractor linkage categories 1 and 2	-	-	-	✓	✓	✓	✓
N° of discs	4	5	6	7	5	6	7
Cutting width feet (cm)	5'7" (170)	6'11" (210)	8' (245)	9'4" (285)	6'11" (210)	8' (245)	9'4" (285)
Cast iron gearbox	✓	✓	✓	✓	✓	✓	✓
Transmission with special heat-treated oversize gears	✓	✓	✓	✓	✓	✓	✓
Oil bath lubrication	✓	✓	✓	✓	✓	✓	✓
Disc flanges mounted to beam for easy removal and inspection	✓	✓	✓	✓	✓	✓	✓
Disc holding flanges with torque limiting device	✓	✓	✓	✓	✓	✓	✓
PTO shaft	✓	✓	✓	✓	✓	✓	✓
Wear-resistant steel skids-slides	✓	✓	✓	✓	✓	✓	✓
Windrow width feet (cm)	1'10"/2'4" (55/70)	3'1"/3'7" 95/110	4'3"/4'9" 130/145	4'9"/6'1" 145/185	80/135	120/175	120/175
Hydraulic lift of the cutter bar	✓	✓	✓	✓	✓	✓	✓
Mowing bar angle	+ 90° / - 35°				+ 90° / - 35°		
Weight lds (kg)	792 (360)	880 (400)	968 (440)	1166 (530)	600	680	710
PTO power rating HP (kW)	27/20	34/25	41/30	48/35	54/40	68/50	75/55
Conditioner system with rollers and pressure adjuster	-	-	-	-	✓	✓	✓




ADJUSTABLE REAR CONVEYOR regulates the output flow of the crop, forming a well sized, well shaped and aerated windrow.

SWATHBOARDS are quickly adjustable according to operator's requirements.

THE TONUTTI mower series has everything required for a highly advanced product: superior technology, safety without compromise and high quality construction.



TONUTTI reserves the right to make changes or add improvements at any time without notice. The information contained herein is general in nature and is not intended for specific application purposes.



tonutti
SINCE 1864
Always one step ahead®



Tonutti Italy
Via Gino Tonutti 3 - 33047
Remanzacco (UD) Italy
Tel. + 39 0432 667015
Fax + 39 0432 668282
info@tonuttigroup.com
www.tonuttigroup.com

Tonutti U.S.A.
1909 Thomas Road
Memphis, TN 38134
Phone (901) 385 8841
Fax (901) 385 8288
info@tonuttiusa.com
www.tonuttigroup.com

Tonutti Russia
T. W. Limited
3 Tekhnicheskaya Street
Perm, 614070 Russia
Phone 007 (3422) 909096
Fax 007 (3422) 909096
twltd@perm.ru
www.tonuttigroup.com






Tonutti knows that making quality forage is no easy task. The first step in obtaining a high quality product is in the mowing. That is why we have developed a new series of mowers that, with a superior mowing technology, provide answers to all the new and growing needs of the market and combine traditional reliability with the highest production capability.


Four versions now available:

- RM 4 - 4 discs - working width feet/mt 5'7"/1,70
- RM 5 - 5 discs - working width feet/mt 6'11"/2,10
- RM 6 - 6 discs - working width feet/mt 8'/2,45
- RM 7 - 7 discs - working width feet/mt 9'4"/2,85

EFFICIENCY - RELIABILITY - HIGH PERFORMANCE

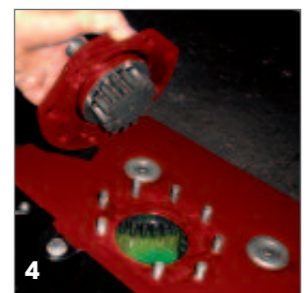

- 1 Cutter bar: low-profiled design; gears in oil bath made from high resistance steel; anti-wear slides.
- 2 Deflector shields fitted between the discs protect the cutter bar; profiled discs made from special steel allow better penetration in all type of forage; hardware and knife changes are easier and faster.
- 3 **Cutter bar protection: splines on the hub will shear protecting the gear drive if the cutter bar hits an obstacle hard enough to stop the disk.**
- 4 Top mounted bolt on gear assemblies for easy maintenance.

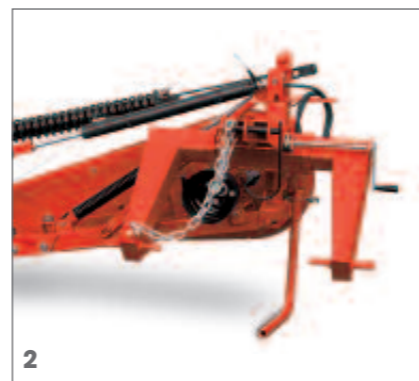

- 1 Fixed main frame; self adjusting compensation spring controls the cutter bar down pressure **(RM 4 - RM 5 - RM 6)**.
- 2 Adjustable main frame allows to offset the cutter bar to take advantage of the full cutting width. Suspension spring controls the cutter bar down pressure **(RM 7)**.
- 3 a) Headland management: the lift height is pre-selected by a mechanical lever (b). On the headland the mower lifts only enough to raise the cutter bar from the ground.

- 4 Transport positions are available:
 - a) vertical transport position on the side of the tractor **(RM 4 - RM 5 - RM 6 - RM 7)**.
 - b) vertical rear pivoting transport position behind the tractor **(RM 7)**.
- Operating range from - 35° to + 90° .

- 5 Adjustable swath shields to adjust the windrow width according to the operator's requirements.
- 6 Breakaway mechanism allows the cutter bar to swing back to avoid obstacles in the field.



PERFORMANCES OF THE CONDITIONER SYSTEM

Thanks to the special conditioning system that can reduce the drying time of the forage up to 50%. The TONUTTI conditioner rollers provide an optimal treatment of different types of forage, preserving quality and nutritional content while accelerating the water evaporation process and ensuring a uniform drying of the crop. The roller conditioning is achieved with the crimping and splitting of the stems that helps remove the waxy coating on the crop and ensures an even drying of stems and leaves. The conditioning system has been designed to make the two rollers interlock to achieve the best conditioning results.

CONDITIONER PRESSURE ADJUSTER. The mechanism affords the possibility of adjusting the conditioner pressure from 0 to 500kg. The mechanism, operated with a lever control, adjusts the distance between the two rollers from 0 to 40mm. At this wider position, the forage passes through the rollers practically without being conditioned. In addition, the same mechanism helps protect the conditioner by reducing the pressure of the rollers in the presence of a foreign object.

SPIRAL-SHAPE ROLLERS operate across the full cutting width and are intermeshed to crimp the forage uniformly. Rollers are off-set to allow an optimal flow of the product, optimising the mower's use even with thick crop.

THE GEARBOX operates both rollers that turn at 1300 rpm with power take off at 540 rpm.

